



PUTTING THE COVER ON

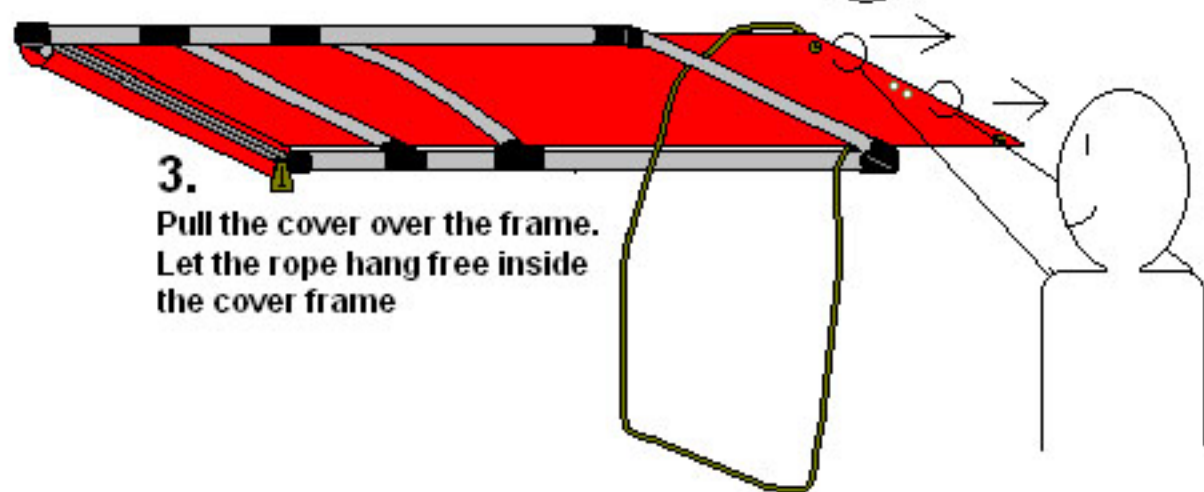


- 1.**
Toss the cover over
the cover frame

- 2.** Zip and close the loop
to secure the cover

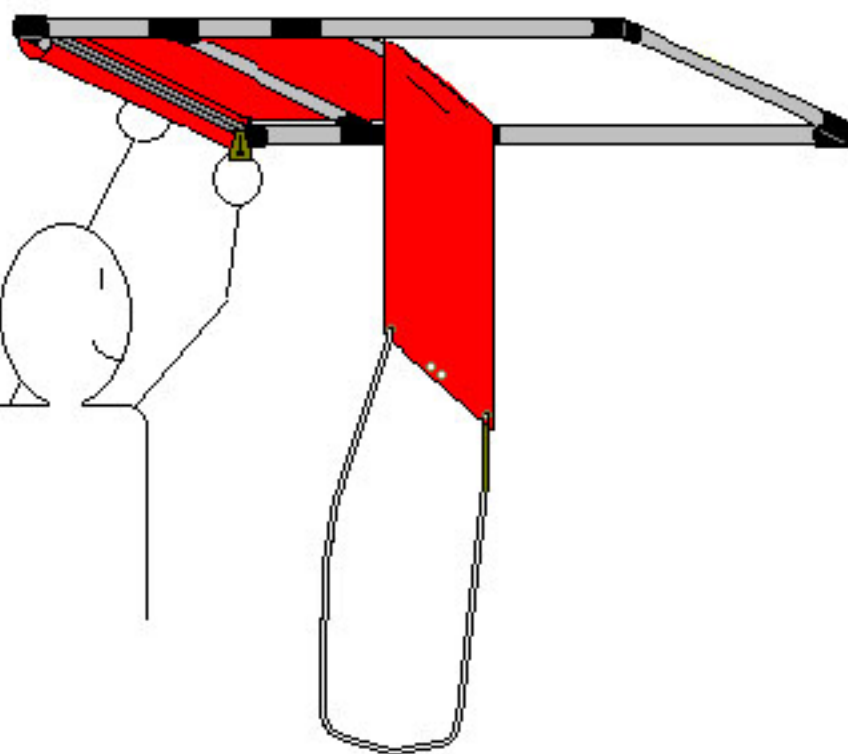

- 3.**
Pull the cover over the frame.
Let the rope hang free inside
the cover frame

PUTTING THE COVER ON

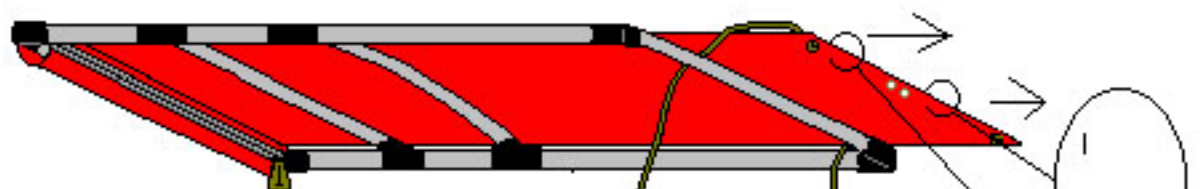


1. Pull the cover over the frame.

LET THE ROPE HANG
DOWN INSIDE THE
COVER FRAME

2.

When you pull the cover
and around the cover
frame, you will form 2 loops
of rope, one at each corner.

LET THE ROPE HANG
DOWN INSIDE THE
COVER FRAME

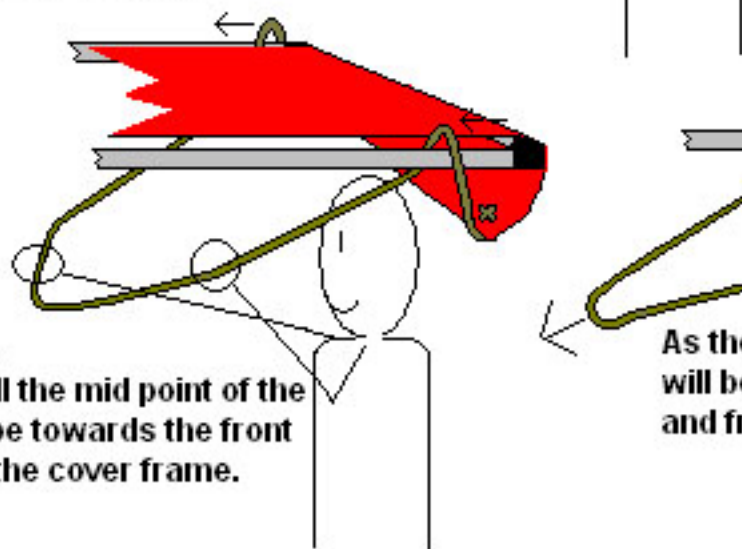

3. Push or pull the loops
around the corners of
the cover frame.



4.


Pull the mid point of the
rope towards the front
of the cover frame.

As the rope is pulled forward, the cover
will be stretched flat from side to side
and front to rear.

ADJUST THE ROPE AND SECURE THE COVER

1. Toss the zipper cover over the Front Edge of the Cover Frame.
2. Use the Zipper and close the loop over the Front Edge of the Cover Frame.
(The zippered cover loop fits between the two elbow fittings.)
3. Pull the Cover over the rear edge of the cover frame, (the cover is about 6 inches longer than the cover frame).
4. Attach and adjust the rope as shown below.

VIEWED FROM DECK LOOKING UP

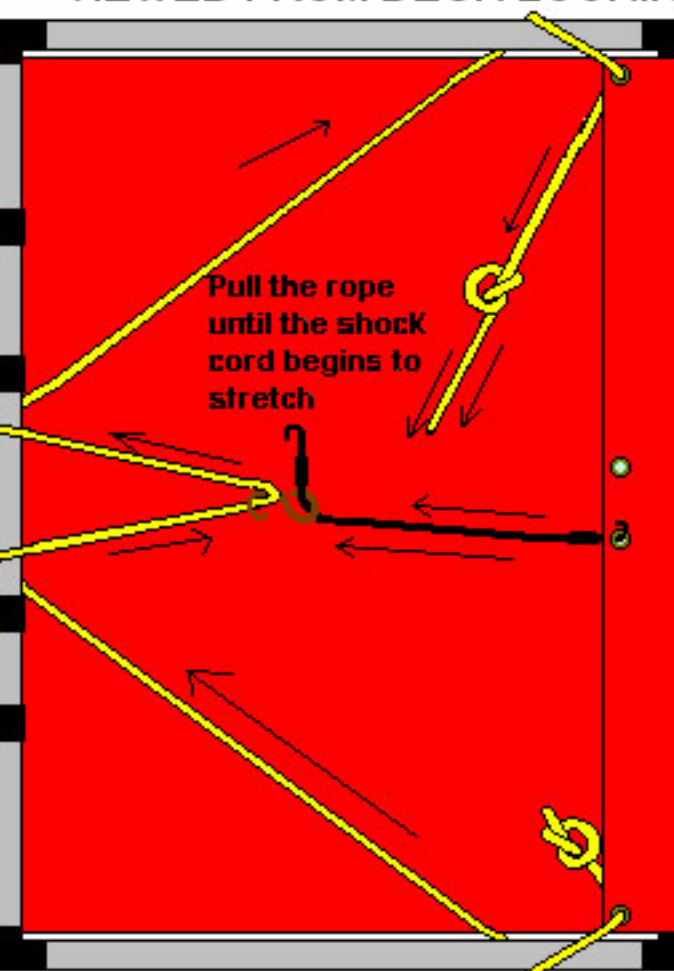

1. Run both ends of the rope through the grommets as shown. Tie an overhand knot at both ends.

2. Loop the rope around the corners and pull the rope forward. Then go over and under the bowed bar.


3. Pull the rope back to the rear and hook the "S" hook to the mid point of the rope.

4. Hook one end of the shock cord to one of the center grommets in the cover.

5. Pull one end of the rope remove all slack in the shock cord and re-tie the knot to maintain the adjusted length.

6. Trim off the excess rope.

Pull the rope until the shock cord begins to stretch

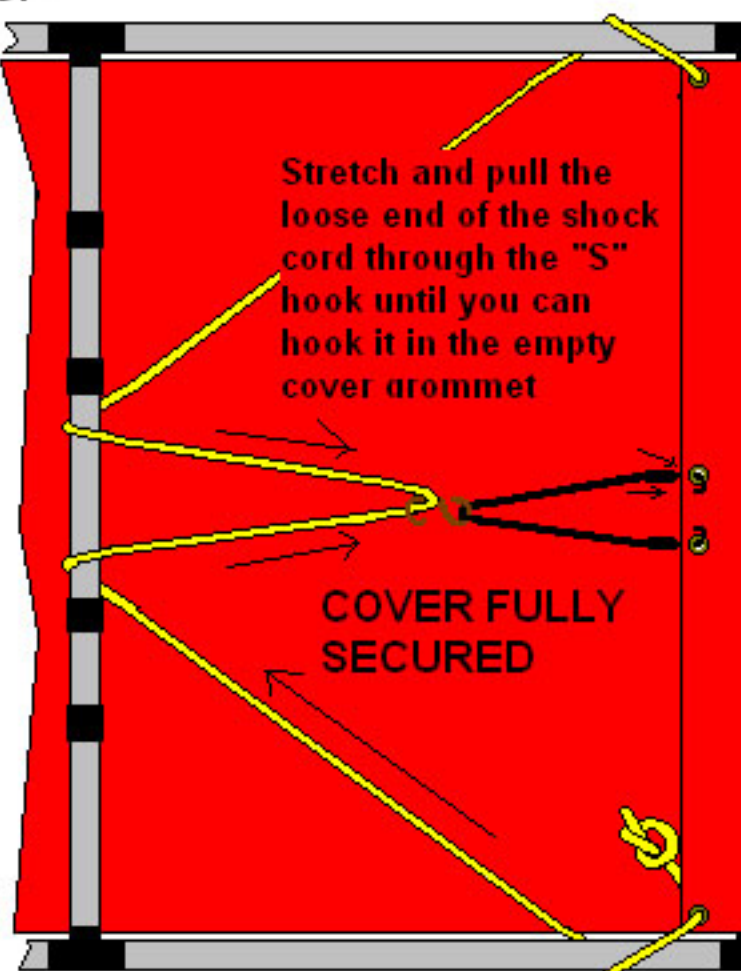

Stretch and pull the loose end of the shock cord through the "S" hook until you can hook it in the empty cover grommet

COVER FULLY SECURED

You Can Adjust The Tension On The Cover Anytime. Just Re-tie The Knot To Shorten The Rope.